



catalog

Content

VentEurope series of fans

FRESH line of fans.....	4
FINE line of fans.....	5
FANCY line of fans.....	6
GENTLE line of fans.....	7
ELEGIA line of fans.....	8
AUTO line of fans.....	9
ROUND line of fans.....	10
VALUE line of fans.....	11
STREAM line of fans.....	12
PLACE line of fans.....	13
CLASSIC line of fans.....	14
REFINED line of fans.....	15
WAY line of fans.....	16
EASY Line of fans.....	17
BLOW Line of fans.....	18
CIRCLE Line of fans.....	19

Options

-  Durable, impact-resistant plastic with a glossy surface
-  Made of polystyrol plastic with a matte surface
-  3-year warranty
-  5-year warranty
-  The cutout overheating protection prevents fire and wire damage
-  Implemented customary sleeve-bearing motor
-  BB Ball-bearing motor provides up to 40 000 hours of operation and allows installing the device into ceilings
-  High Power Engine
-  Back-draught shutter with plastic wings
-  Noiseless back-draught shutter with plastic wings and silicon stoppers
-  Insect net prevents mosquito intrusion
-  Pull-cord switch for manual actuation
-  Combination of timer and humidity sensor
-  Timer
-  Easily detachable face panel
-  2 ventilation modes
-  Shortened flange
-  Device operation is indicated with LED
-  Half-reduced power consumption as compared with analogues models
-  Quiet fans with a noise level less than 25 dB(A) that is equal to whisper

FRESH line of fans



Additional options

Exhaust fans for wall and ceiling application.

For mounting into ventilation shafts or junction with air ducts.

100 and 125 mm flange diameter.

Trendy design of the solid, gently incurved face panel.

Low noise ball-bearing motor with an extended service life (up to 40 000 hours of continuous operation).

Reduced power consumption.

Noiseless back-draught shutter with rubber stoppers.

Fits for ceiling mounting (back-draught shutter must be removed).


IP24 Ingress protection rating for electrical equipment.



Overall dimensions

Item code	A	B	X	Y	E	C	d	F*
FRESH 4	175	220	135	135	74	44	98	6
FRESH 5	190	237	160	160	79	52	123	6

* referred only to fans equipped with a back-draught shutter

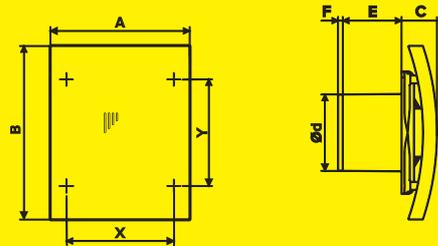

Technical specifications



Specifications	FRESH 4	FRESH 4 TURBO	FRESH 5
Diameter, mm	98	98	123
Power consumption, W	9	16	13
Capacity, m3/h	90	110	165
Pressure, Pa	30	35	48
Noise level, dB(A)	25	36	30
Current consumption, A	0,04	0,07	0,06

FINE line of fans



Additional options

Exhaust fans for wall and ceiling application.

For mounting into ventilation shafts or junction with air ducts.

100 and 125 mm flange diameter.

Tasteful design of the solid face panel with smooth lines.

Ball-bearing motor with an extended service life (up to 40 000 hours of continuous operation).

Noiseless back-draught shutter with rubber stoppers.

Fits for ceiling mounting (back-draught shutter must be removed).


IP24 Ingress protection rating for electrical equipment.




Overall dimensions

Item code	A	X	E	C	d	F*
FINE 4	170	135	74	38	98	6
FINE 5	200	160	79	38	123	6

* referred only to fans equipped with a back-draught shutter

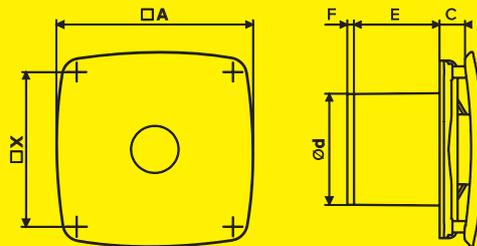

Technical specifications

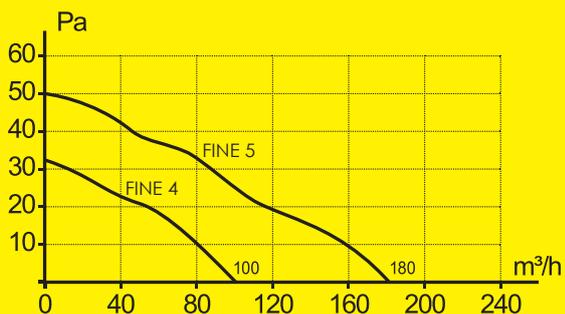

Specifications	FINE 4	FINE 5
Diameter, mm	98	123
Power consumption, W	14	16
Capacity, m3/h	100	180
Pressure, Pa	32	50
Noise level, dB(A)	32	33
Current consumption, A	0,06	0,07

FANCY line of fans



Exhaust fans for wall and ceiling application.

For mounting into ventilation shafts or junction with air ducts.

100 and 125 mm flange diameter.

Low noise ball-bearing motor with an extended service life (up to 40 000 hours of continuous operation).

Reduced power consumption.

Fits for ceiling mounting (back-draught shutter must be removed).

IP24 Ingress protection rating for electrical equipment.


Additional options




Overall dimensions

Item code	A	X	E	C	d	F*
FANCY 4	155	135	70	31	100	7
FANCY 5	175	155	78	31	125	8,5

* referred only to fans equipped with a back-draught shutter

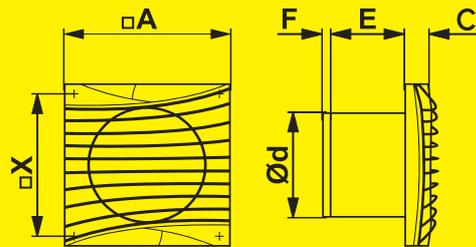

Technical specifications

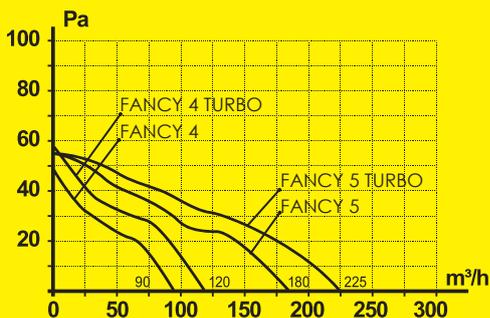

Specifications	FANCY 4 / TURBO	FANCY 5 / TURBO
Diameter, mm	100	125
Power consumption, W	8,4 / 19	10 / 20
Capacity, m3/h	90 / 120	180 / 225
Pressure, Pa	48 / 56	58 / 58
Noise level, dB(A)	25 / 36	30 / 38
Current consumption, A	0,04 / 0,09	0,05 / 0,09

GENTLE line of fans



Exhaust fans for wall and ceiling application.

For mounting into ventilation shafts or junction with air ducts.

100 and 125 mm flange diameter.

Low noise ball-bearing motor with an extended service life (up to 40 000 hours of continuous operation).

Reduced power consumption.

Fits for ceiling mounting (back-draught shutter must be removed).

IP24 Ingress protection rating for electrical equipment.


Additional options



Overall dimensions

Item code	A	X	E	C	d	F*
GENTLE 4	155	135	70	24	100	7
GENTLE 5	175	155	78	24	125	8,5

* referred only to fans equipped with a back-draught shutter

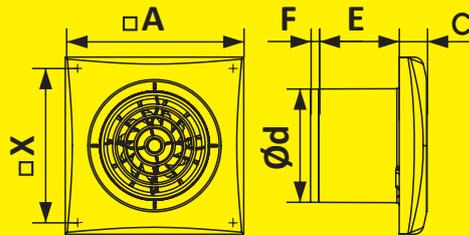

Technical specifications



Specifications	GENTLE 4	GENTLE 5
Diameter, mm	100	125
Power consumption, W	8,4	10
Capacity, m3/h	90	180
Pressure, Pa	48	58
Noise level, dB(A)	25	30
Current consumption, A	0,04	0,05

ELEGIA line of fans



Exhaust fans for wall and ceiling application.

For mounting into ventilation shafts or junction with air ducts.

Extra-slim face panel.

Low noise ball-bearing motor with an extended service life (up to 40 000 hours of continuous operation).

Reduced power consumption.

Fits for ceiling mounting (back-draught shutter must be removed).

IP24 Ingress protection rating for electrical equipment.


Additional options




Overall dimensions

Item code	A	X	E	d	F*
ELEGIA 4	160	140	76	100	7
ELEGIA 5	180	160	82	125	8,5
ELEGIA 6	205	187	86	150	10

* referred only to fans equipped with a back-draught shutter

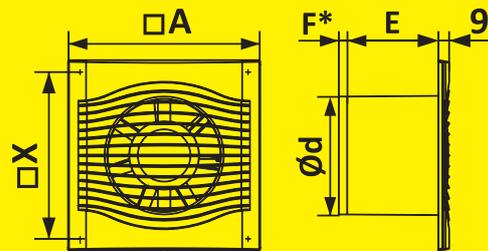

Technical specifications

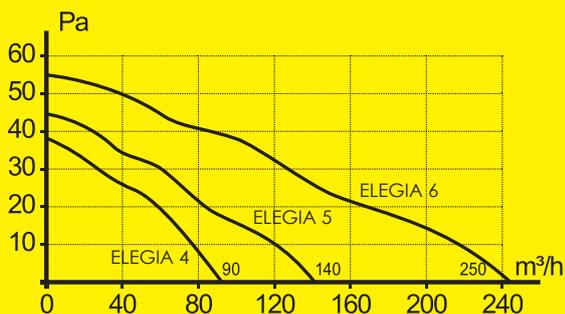

Specifications	ELEGIA 4	ELEGIA 5	ELEGIA 6
Diameter, mm	100	125	150
Power consumption, W	7,8	10	10
Capacity, m3/h	90	140	250
Pressure, Pa	39	44	54
Noise level, dB(A)	25	30	33
Current consumption, A	0,04	0,05	0,05

AUTO line of fans



Exhaust fans for wall application.
For mounting into ventilation shafts or junction with air ducts.

Fans are equipped with automatic shutters independently opening after actuation of the device. In an "Off" mode, the shutters block air-flow preventing back draft.

IP24 Ingress protection rating for electrical equipment.

! Thermal actuator ensures smooth opening and closing of the automatic shutters in the next 45 sec after the fan is switched on/off.




Additional options




Overall dimensions

Item code	A	B	X	Y	C	E	d
AUTO 4	160	140	140	120	30	62	100
AUTO 5	187,6	160	160	140	30	66	125

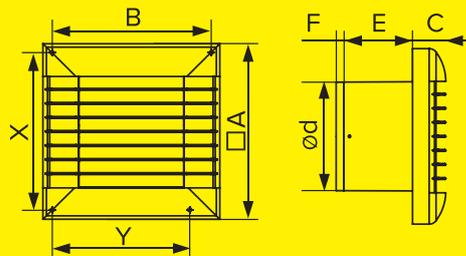

Technical specifications

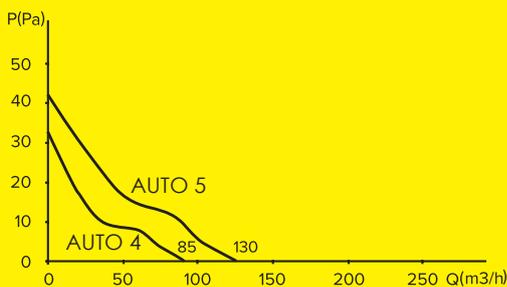

Specifications	AUTO 4	AUTO 5
Diameter, mm	100	125
Power consumption, W	16	16
Capacity, m3/h	85	130
Pressure, Pa	33	42
Noise level, dB(A)	35	36
Current consumption, A	0,06	0,07

ROUND line of fans



Innovative design of the face panel allows to set the central movable part in two positions to control the air-flow.

Shortened flange allows to mount the fan into the shafts limited in depth and into the ceilings (only the fans with BB-option).

Five decorative color covers included into the kit.

IP24 Ingress protection rating for electrical equipment.


Additional options




Overall dimensions

Item code	A	X	E	d	C	F*
ROUND 4	159	125	48	100	37,4 ÷ 45,5	5
ROUND 5	183	145	54	125	39 ÷ 47	7

* referred only to fans equipped with a back-draught shutter

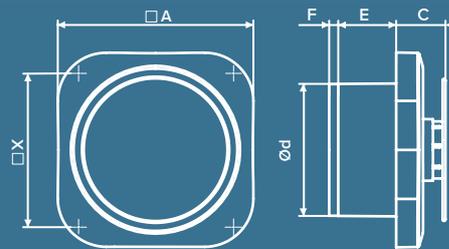

Technical specifications

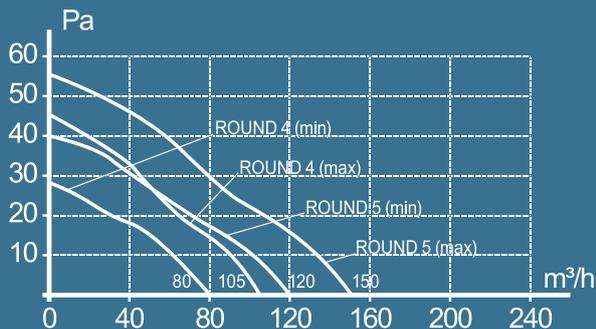

Specifications	ROUND 4	ROUND 5
Diameter, mm	100	125
Power consumption, W	17	20
Capacity, m3/h	105 / 80	150 / 120
Pressure, Pa	45 / 28	55 / 40
Noise level, dB(A)	35	36
Current consumption, A	0,07	0,09

VALUE line of fans



Additional options


Easily detachable face panel.
 For mounting into ventilation shafts or junction with air ducts.
 Mounting legs for fastening
 100 and 120 mm flange diameter.
 Fits for ceiling mounting (only the fans with BB-option).
 IP24 Ingress protection rating for electrical equipment.




Overall dimensions

Item code	A	X	E	d	C	F*
VALUE 100	151	110	70	100	19	6
VALUE 120	181	130	69	120	19	6

* referred only to fans equipped with a back-draught shutter

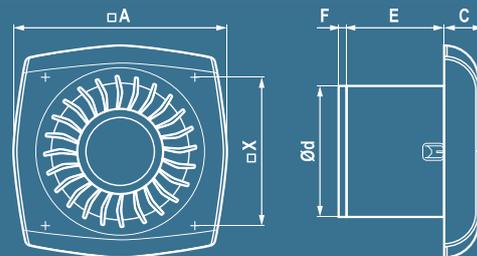

Technical specifications

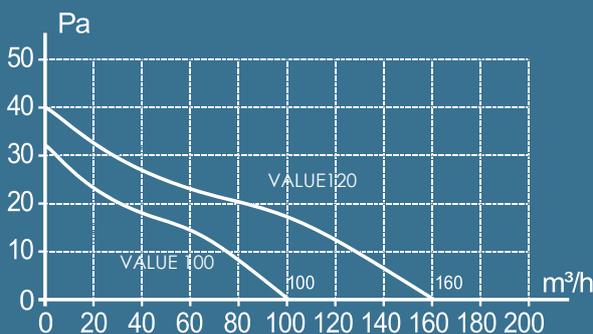

Specifications	VALUE 100	VALUE 120
Diameter, mm	100	120
Power consumption, W	14	16
Capacity, m3/h	100	160
Pressure, Pa	32	40
Noise level, dB(A)	25	30
Current consumption, A	0,06	0,07

STREAM line of fans



Easily detachable face panel.

Due to an original design of the fan body, a solid face panel doesn't prevent from a proper air exhaust process.

For mounting into ventilation shafts or junction with air ducts.


Mounting legs for fastening

100 and 120 mm flange diameter.

Fits for ceiling mounting (only the fans with BB-option).

IP24 Ingress protection rating for electrical equipment.


Additional options

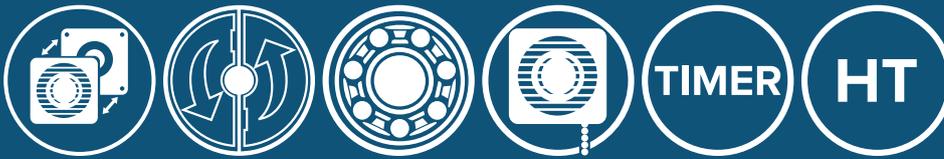


Overall dimensions

Item code	A	X	E	d	C	F*
STREAM 100	151	110	70	100	33	6
STREAM 120	181	130	69	120	33	6

* referred only to fans equipped with a back-draught shutter

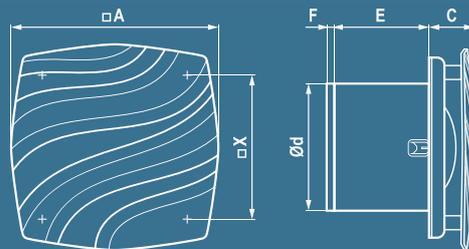

Technical specifications

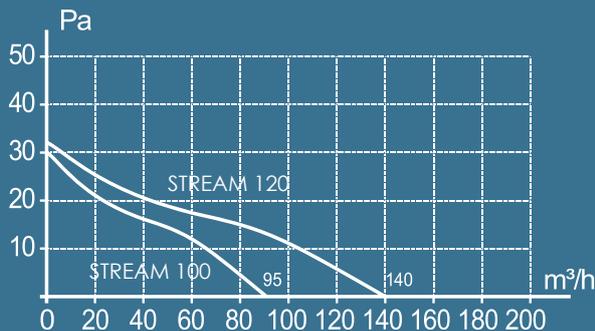

Specifications	STREAM 100	STREAM 120
Diameter, mm	100	120
Power consumption, W	14	16
Capacity, m3/h	95	140
Pressure, Pa	30	32
Noise level, dB(A)	25	30
Current consumption, A	0,06	0,07

PLACE line of fans



Additional options

Easily detachable face panel.

Standard white face panel can be substituted with a color one to match the fan into interior (7 colors available, color panels are purchased separately).

Due to an original design of the fan body, a solid face panel doesn't prevent from a proper air exhaust process. The fan's efficiency characteristics are confirmed by laboratory testing.

Special mounting pattern helps with defining mounting spots position.

Fans with C-option are equipped with back-draught shutters of a new design.


IP24 Ingress protection rating for electrical equipment.




Overall dimensions

Item code	A	X	E	d	C	F*
PLACE 4	172	135	74	98	38	6
PLACE 5	200	160	79	123	38	6

* referred only to fans equipped with a back-draught shutter

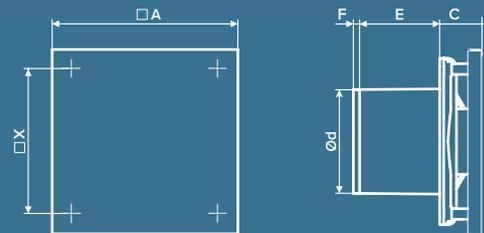

Technical specifications

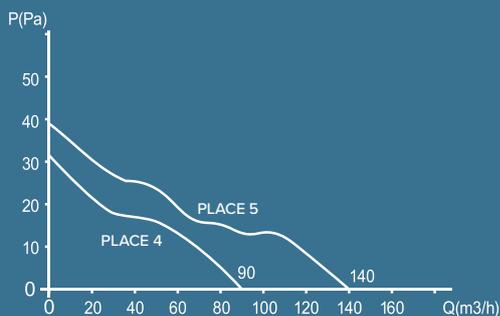

Specifications	PLACE 4	PLACE 5
Diameter, mm	98	123
Power consumption, W	16	20
Capacity, m3/h	90	140
Pressure, Pa	31	38
Noise level, dB(A)	35	36
Current consumption, A	0,06	0,07


CLASSIC line of fans



Traditional design with straight shutters.
Wide choice of additional options.
CLASSIC 4 and CLASSIC 5 are equipped with LED indication.
IP24 Ingress protection rating for electrical equipment.




Additional options

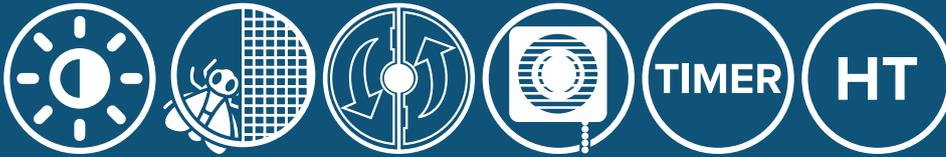


Overall dimensions

Item code	A	X	E	d	C	F*
CLASSIC 4	150	135	55	100	22	5
CLASSIC 5	175	160	61	125	23	7
CLASSIC 6	200	185	62	150	24	10

* referred only to fans equipped with a back-draught shutter

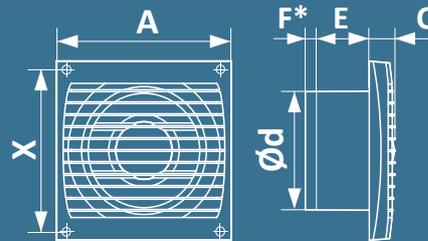

Technical specifications

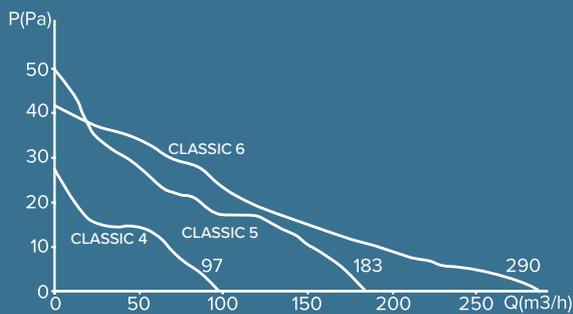


Specifications	CLASSIC 4	CLASSIC 5	CLASSIC 6
Diameter, mm	100	125	150
Power consumption, W	14	16	16
Capacity, m3/h	97	183	290
Pressure, Pa	28	50	42
Noise level, dB(A)	35	36	38
Current consumption, A	0,06	0,07	0,07

REFINED line of fans



Extra-slim face panel.
Sleeve-bearing motor doesn't require extra maintenance.
IP24 Ingress protection rating for electrical equipment.

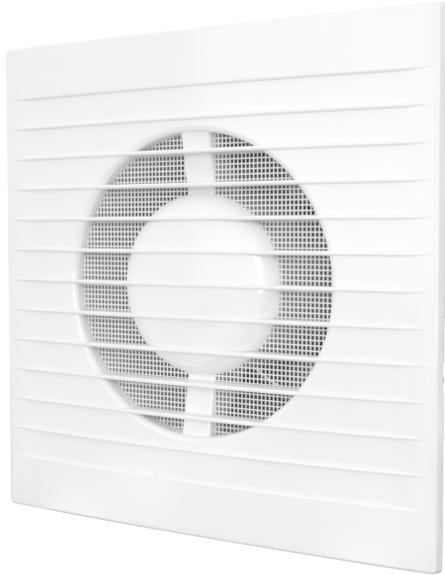


Additional options




Overall dimensions

Item code	A	X	d	C	E	F*
REFINED 4	160	140	100	9	76	7
REFINED 5	180	160	125	9	82	8,5
REFINED 5	205	187	150	9	86	10

* referred only to fans equipped with a back-draught shutter

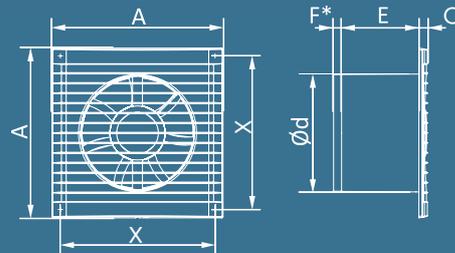

Technical specifications

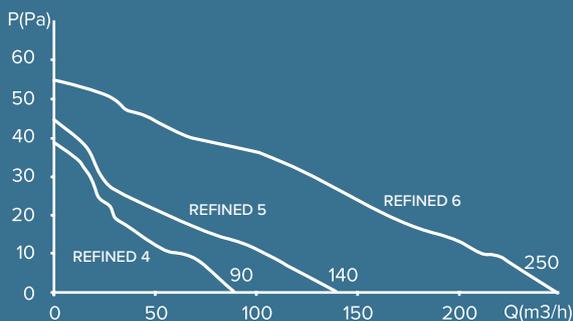

Specifications	REFINED 4	REFINED 5	REFINED 6
Diameter, mm	100	125	150
Power consumption, W	14	16	16
Capacity, m3/h	90	140	250
Pressure, Pa	39	44	54
Noise level, dB(A)	35	36	38
Current consumption, A	0,06	0,07	0,07

WAY line of fans



Additional options

Can be installed either in between the vent ducts or at ventilation channel output.

For supply and exhaust ventilation systems.

WAY 12V is powered by 12-volt circuit.


Besides standard 220 V fans, WAY range is also supplemented with the safe motor devices powered by 12-volt AC circuit, typical for high humidity premises such as garages, ellars, etc.

IP24 Ingress protection rating for electrical equipment.




Overall dimensions

Item code	d	D	A	E
WAY 4	100	103	80	30
WAY 5	125	128	87	30
WAY 6	160	163	101	35

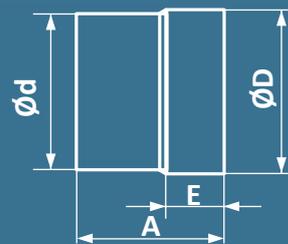

Technical specifications

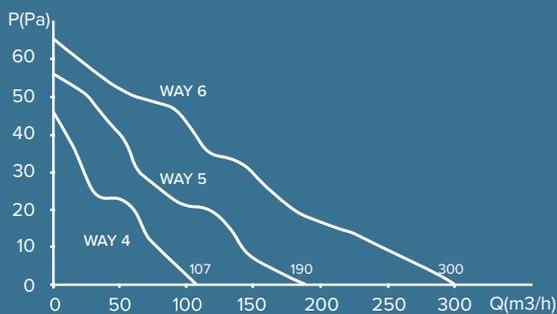

Specifications	WAY 4	WAY 5	WAY 6
Diameter, mm	100	125	160
Power consumption, W	14	18	22
Capacity, m ³ /h	107	190	300
Pressure, Pa	46	56	65
Noise level, dB(A)	35	36	38
Current consumption, A	0,06	0,08	0,1

EASY Line of fans



Open-face-panel type fans show better performance characteristics.

Pull-cord switch and back-draught shutter are additionally available.

IP24 Ingress protection rating for electrical equipment.




Additional options




Overall dimensions

Item code	A	X	E	d	C	F*
EASY 4	150	135	55	100	22	5
EASY 5	175	160	61	125	23	7
EASY 6	200	185	62	150	24	10

* referred only to fans equipped with a back-draught shutter

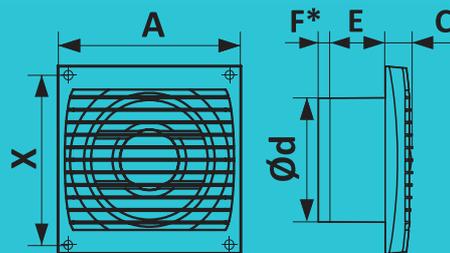

Technical specifications

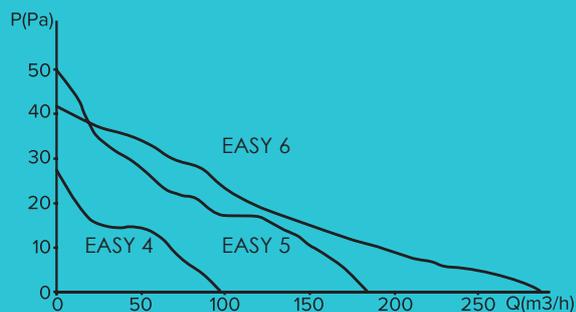

Specifications	EASY 4	EASY 5	EASY 6
Diameter, mm	100	125	150
Power consumption, W	14	16	16
Capacity, m³/h	97	183	290
Pressure, Pa	28	50	42
Noise level, dB(A)	35	36	38
Current consumption, A	0,06	0,07	0,07

BLOW Line of fans



Additional options

Inline fan.


Mounted into round ventilation ducts.

When used with DSKP line duct holders, the fan can be installed in between two plastic ducts.


Works in supply or exhaust mode depending on how it is mounted into the ventilation system.

Overall dimensions

Item code	d	D	A	E
BLOW 4	100	103	80	30
BLOW 5	125	128	87	30
BLOW 6	160	163	101	35

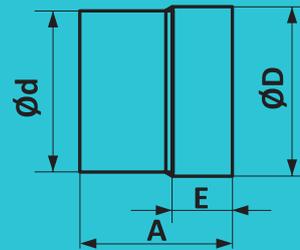

Technical specifications

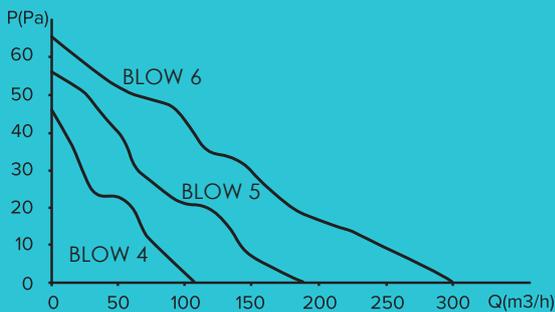

Specifications	BLOW 4	BLOW 5	BLOW 6
Diameter, mm	100	125	160
Power consumption, W	14	18	22
Capacity, m3/h	107	190	300
Pressure, Pa	46	56	65
Noise level, dB(A)	35	36	38
Current consumption, A	0,06	0,08	0,1

CIRCLE Line of fans



Exhaust fan for mounting into round ducts.

Back-draught shutter is additionally available.

IP24 Ingress protection rating for electrical equipment.




Additional options




Overall dimensions

Item code	d	X	D	D1	E	A	C	F*
CIRCLE 4	100	125	103	143	52	33	11	5
CIRCLE 5	125	150	128	164	58	34	12	7
CIRCLE 6	160	185	163	200	66	42	13	-

* referred only to fans equipped with a back-draught shutter

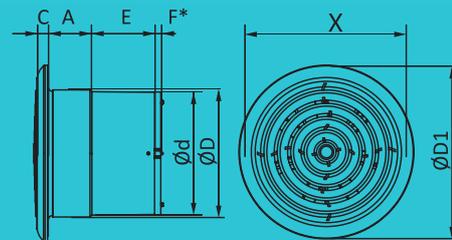

Technical specifications

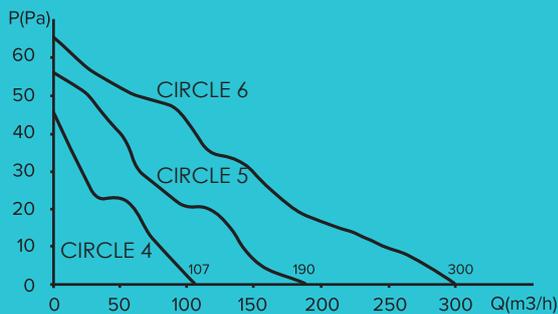

Specifications	CIRCLE 4	CIRCLE 5	CIRCLE 6
Diameter, mm	100	125	160
Power consumption, W	14	18	22
Capacity, m3/h	107	190	300
Pressure, Pa	46	56	65
Noise level, dB(A)	35	36	38
Current consumption, A	0,06	0,08	0,1

